



KONICA MINOLTA

bizhub 3300P

✍ Black & white A4 printer

✍ Up to 33 pages per minute

✍ Functionality



Printing


- Black & white
- PCL/PS
- Local/Network



Technology

| | | |
|---------------------------------|--|---|
| Emperon™ – print controller | Easily compatible with different users and IT environments through Konica Minolta's unified print technology | X |
| Simitri® HD – polymerised toner | Delivers high print quality and yet ensures reduced print spending as well as lower environmental impact | X |
| OpenAPI – solution platform | Server-based applications provide efficient workflows for the entire MFP fleet | X |
| i-Option – special feature | Offers extended scope and advanced MFP functionality in line with individual requirements | X |
| CSRC – remote service | Keeps productivity up with online monitoring of devices and consumables through the Konica Minolta service | ✓ |
| IWS – panel customisation | Improved user-device interaction and enhanced productivity through full MFP panel customisation | X |

Option diagram

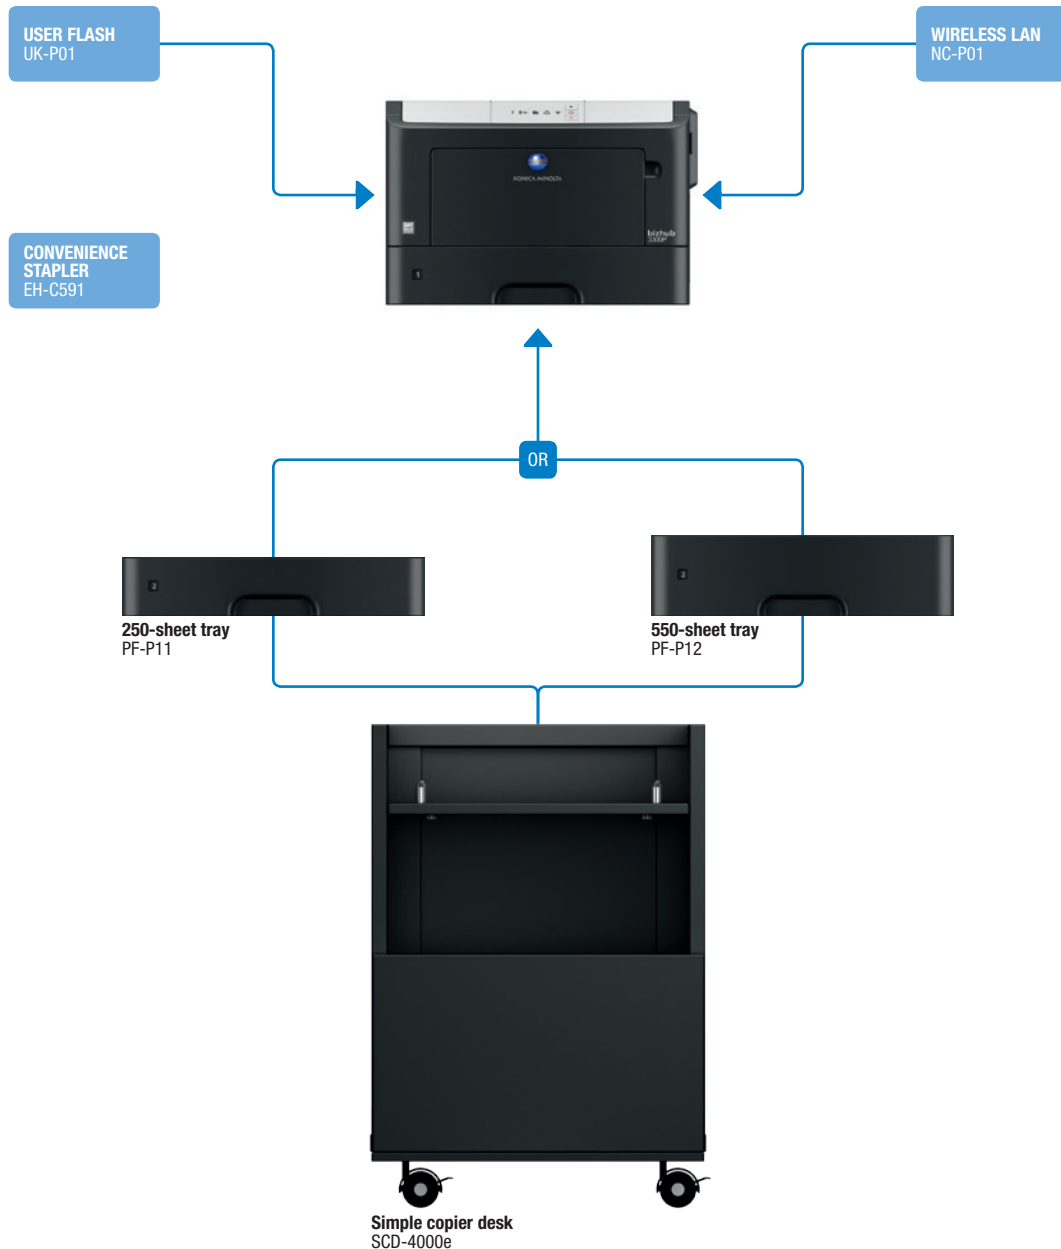

Finishing functionality



Duplex

Descriptions

| | |
|--------------------------|--|
| bizhub 3300P | Laser printer with 33 ppm b/w. Equipped with standard network interface, PCL 5/6, PostScript 3 and XPS support. Paper capacity of 250 sheets and 50-sheet manual bypass. Media from A6 to A4 and 60–163 gsm. 128 MB memory provided by standard. |
| PF-P11 Paper tray | A5–A4, 250 sheets, 60–120 gsm |
| PF-P12 Paper tray | A5–A4, 550 sheets, 60–120 gsm |

| | |
|------------------------------------|--|
| SCD-4000e Copier desk | Ensures ergonomic height and provides storage space for print media, etc. |
| UK-P01 User flash | 256 MB User flash for storing fonts, forms and macros or to save job account log |
| NC-P01 Wireless LAN | Wireless LAN to network connector |
| EH-C591 Convenience stapler | Convenient stapling of up to 50 prints per set |

Technical specifications

SYSTEM SPECIFICATIONS

| | |
|--------------------------------------|---|
| System memory | 128 MB (standard) |
| Interface | 10-Base-T/100-Base-TX Ethernet USB 2.0, IEEE 1284 Bidirectional Parallel |
| Network protocols | TCP/IP (IPv4 / IPv6); AppleTalk (EtherTalk); TCP; UDP |
| Printable paper size | A6–A4, customised paper sizes |
| Printable paper weight | 60–163 gsm |
| Paper input capacity | Standard: 300 sheets Max.: 850 sheets |
| Paper tray 1 | 250 sheets, A6–A4, 60–90 gsm |
| Paper tray 2 (optional) | 250 or 550 sheets, A5–A4, 60–120 gsm |
| Manual bypass | 50 sheets, A6–A4, custom sizes, 60–163 gsm |
| Automatic duplexing | A4; 60–90 gsm |
| Output capacity | Max.: 150 sheets |
| Print volume (monthly) | Rec.: 3,600 pages Max. ¹ : 50,000 pages |
| Toner lifetime | Up to 10,000 pages |
| Imaging unit lifetime | Up to 60,000 pages |
| Power consumption | 220–240 V / 50/60 Hz Less than 520 W |
| System dimensions (W x D x H) | 399 x 382 x 263 mm |
| System weight | Approx. 14 kg |

PRINTER SPECIFICATIONS

| | |
|----------------------------------|--|
| Printing process | Electrostatic laser |
| Print speed A4 | Up to 33 ppm |
| Autoduplex speed A4 | Up to 28 ppm |
| 1st print out time | 6.5 sec. |
| Print resolution | 1200 x 1200 dpi |
| Page description language | PCL 5/6 PostScript 3 XPS |
| Operating systems | Windows VISTA (32/64) Windows 7 (32/64) Windows 8 (32/64) Windows Server 2003 (32/64) Windows Server 2008 (32/64) Windows Server 2008 R2 Windows Server 2012 Windows Server 2012 R2 Macintosh OS X 10.x Linux, Citrix |
| Printer fonts | 89 PCL Latin 91 PostScript 3 Emulation Latin |
| Print functions | Duplex, n-up, watermark, electronic sorting |

SYSTEM FEATURES

| | |
|-----------------|--|
| Security | TCP/UDP port disabling; certificate management; SNMPv3; HTTPS server; SSL protocol; IEEE 802.1x support; SMTP authentication |
| Software | PageScope Net Care Device Manager |

¹ If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed

- All specifications refer to A4-size paper of 80 gsm quality.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
- Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

Cartridge Return Program

Konica Minolta Return Program cartridges are patented print cartridges sold at a discount in exchange for the customer's agreement to the license requirement that the cartridges will be used only once and returned only to manufacturer for remanufacturing or recycling. These patented cartridges are licensed for single use only and will stop working after delivering a fixed amount of toner. Toner may remain in the cartridge when replacement is required. Replacement cartridges sold without these restrictions (non-returnable cartridges) are also available. Please contact a Konica Minolta representative for further details and availability.



SAP® Printer Vendor Solution



Visit our product page